



PERFECT SHUTTERS, inc.

The World's Largest Selection of Styles, Sizes, & Colors

www.perfectshutters.com

sales@perfectshutters.com

Installation Instructions Board-n-Batten Shutters

WATCH OUR INSTALLATION VIDEO: <http://perfectshutters.com/product-support/installation-2/>

1. Lay the shutter face up on a clean, flat surface.
2. Drill a 1/4" inch diameter hole through all horizontal rails, in center and 1 3/4" from each edge
Open Weave: Mark and drill at all vertical boards **SEE FIGURE #1**
Closed Weave: Mark and drill only at the two outside vertical boards **SEE FIGURE #2**
3. Position the shutter on the house next to the window. Using a suitable marker, mark the mounting hole locations on the building.
4. Remove the shutter and, where marked, drill a 1/4" inch diameter hole through the Wood, Vinyl or Aluminum siding only.
Do not drill into the wall
5. If the wall is Wood
 - Drill a 1/8" inch diameter hole, 1 3/4" deep into the wall.If the wall is Masonry or Brick
 - For Masonry or Brick you will need a screw anchor for a #10 screw. The type of anchor purchased will determine the diameter of the hole. Follow the anchor manufacturer's instructions for installation
7. Position the shutter on the house next to the window and fasten with the metal screws provided.
Be careful not to over tighten the metal screws or the shutter may become distorted
We suggest using a Hand Screw Driver rather than a Power Drill
8. Repeat this process for all remaining shutters.

FIGURE #1


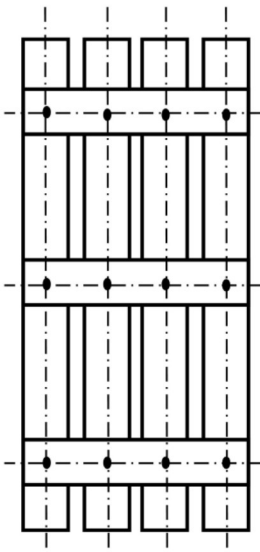


FIGURE #2

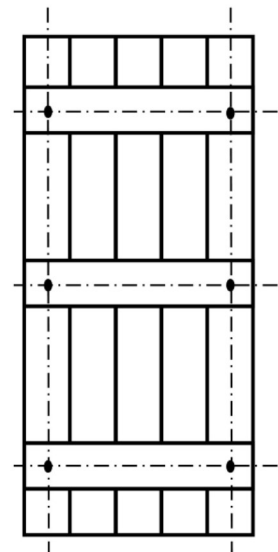

*** For the Warranty to Be In Force ***

The shutter must be mounted with the shutter screws in the positions specified in the illustration. The shutter screws must go into the wall.

TOOLS REQUIRED

- Power Drill
- Pencil/Marker
- Phillips Head Screw Driver
- 1/4" Drill Bit
- Tape Measure
- 1/8" Drill Bit

*** If Installing on Masonry or Brick Surface,
Purchase #10 Screw Anchors ***